


PREPARATION FOR SAVING ADDITIONAL 433.92Mhz REMOTE CONTROLS

Move as close as possible to the radio receiver, usually installed inside the system control unit (as shown in the diagram), in the container for wall-mounting or on the operator.

EXAMPLE OF THE AUTOMATION (SLIDING GATE)

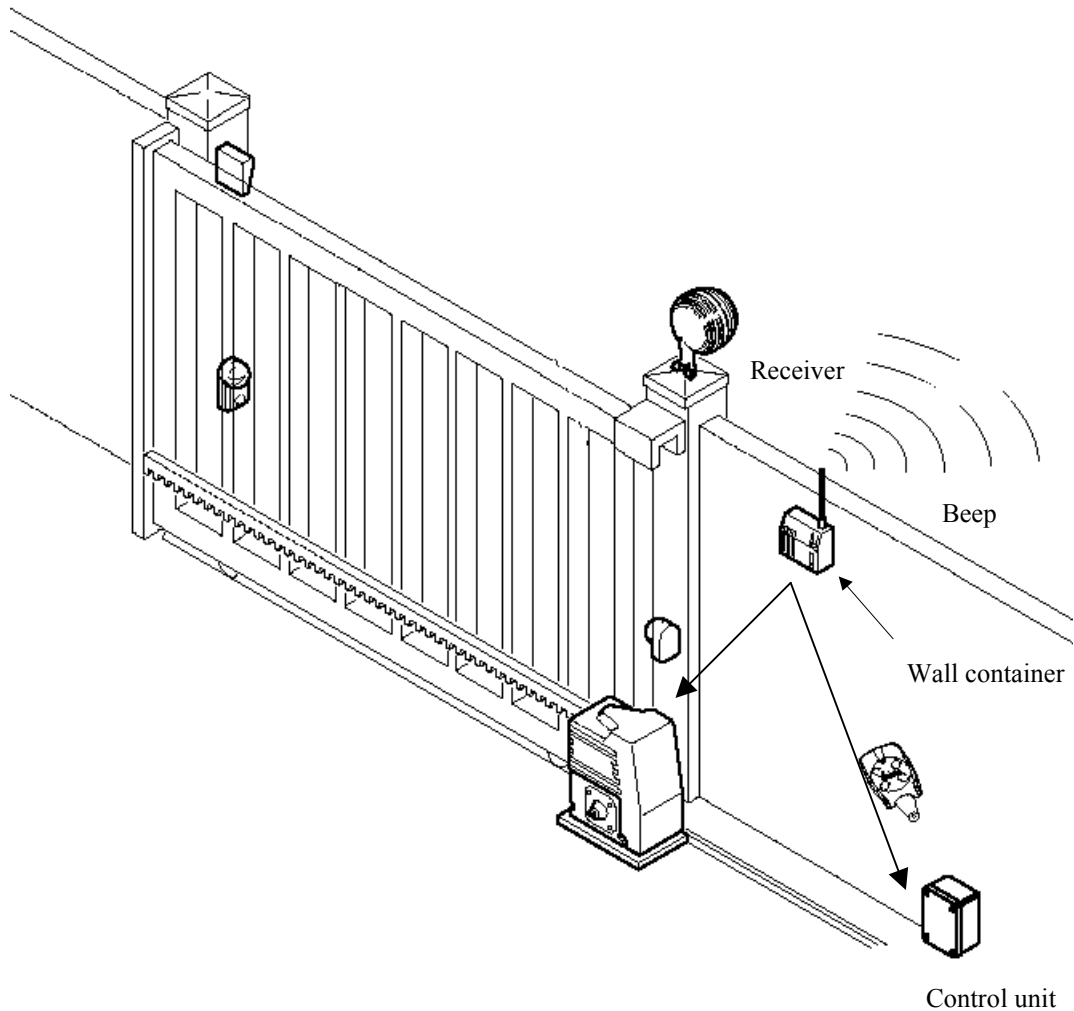

SAVING ADDITIONAL REMOTE CONTROLS

To save a new remote control, proceed as follows:

1. Press **ALL** the buttons **at the same time** (2 buttons on the double-channel remote controls, 4 buttons on the four-channel remote controls) of a remote control **already in use** until the receiver makes a continuous beeping noise (the beep continues for a maximum 30 sec., within which the new remote control must be saved).
2. Press **ALL** the buttons for the new remote control **at the same time**. The sound must stop for a moment (approximately 1.5 seconds) and then start again. Release the buttons.
3. Press any button on the **NEW** remote control. The sound must stop for a moment (approximately 1.5 seconds) and then start again.

NOTE: If all the buttons **are not pressed down at the same time**, the receiver does not recognise the new remote control.